




MIXER[®]
COMPOUNDS

DETAILS MATTER.

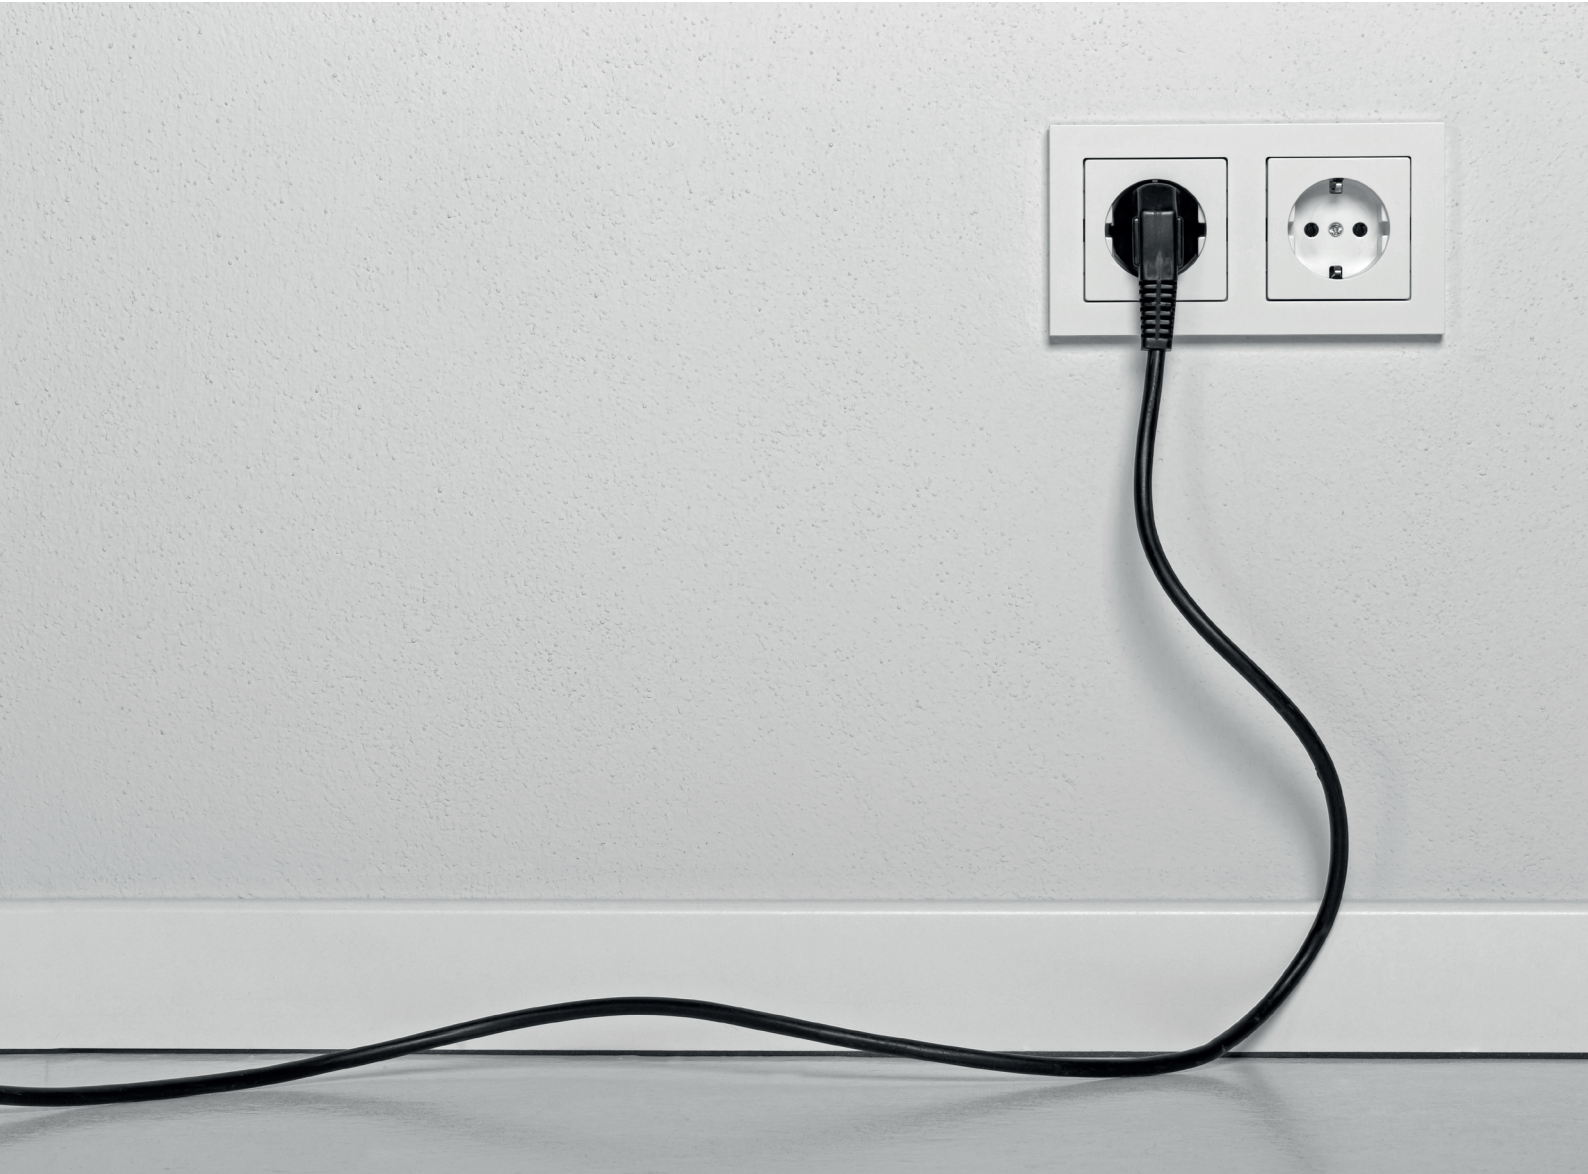

FLEXIBLE SHEATHING RUBBER COMPOUNDS

EKOPREN[®]

mixercompounds.com




ALL

NBR/PVC		APPLICATION	TS MPa	EB %	DENSITY g/cm ³	HARDNESS SHORE	LOI %	PROPERTIES
EKOPREN® 3SH341		EM2 CO-EXTRUSION	11	320	1,45	72 (A)	27	
EKOPREN® 3SH351		EM2	11	350	1,45	75 (A)	26	
EKOPREN® 3SH371		EM2	11	320	1,44	79 (A)	28	
EKOPREN® 3SH411		EM2	11	350	1,43	65 (A)	26	

CPE		APPLICATION	TS MPa	EB %	DENSITY g/cm ³	HARDNESS SHORE	LOI %	PROPERTIES
EKOPREN® 3SH131		KY	12,7	300	1,40	72 (A)	28	
EKOPREN® 3SH561		EM2-EM5-EM7	11	320	1,48	79 (A)	27	
EKOPREN® 3SH93A		EM2-EM5-EM7	11	400	1,43	70 (A)	26	
EKOPREN® 3SH941		EM2-EM5-EM7	11	400	1,44	72 (A)	24	
EKOPREN® 3SH951		EM2-EM5-EM7	11	400	1,43	70 (A)	24	

CPE+		APPLICATION	TS MPa	EB %	DENSITY g/cm ³	HARDNESS SHORE	LOI %	PROPERTIES
EKOPREN® 3SH471	○	EM2-5GM3-EM7	11	350	1,43	74 (A)	28	
EKOPREN® 3SH481		EM2-EM5-EM7	12,5	320	1,40	66 (A)	30	
EKOPREN® 3SH511		UL1581 50.28 TO 50.31, 50.33-EM7-5GM3-5GM5	15	400	1,40	77 (A)	29	

HFFR		APPLICATION	TS MPa	EB %	DENSITY g/cm ³	HARDNESS SHORE	LOI %	PROPERTIES
EKOPREN® 3SH071	○	EM3-EM6	7	250	1,36	68 (A)	-	
EKOPREN® 3SH611		EM3-EM6	7	250	1,38	77 (A)	-	
EKOPREN® 3SH66A		EM2-EM3-EM5-EM6-EM7	10	300	1,33	79 (A)	24	
EKOPREN® 3SH821	○	SHF 2-EM8-EM101-EM102-EM103-EM104	10	150	1,57	41 (D)	31	
EKOPREN® 3SH831	○	SW4-SHF2-MUD	9	150	1,55	75 (A)	29	
EKOPREN® 3SH841	○	M18	10	150	1,57	40 (D)	40	
EKOPREN® 3SH881	○	PV-M21	11	150	1,55	34 (D)	30	



○ COLORABLE





NBR/PVC

CPE

CPE+

HFFR

Hardness Shore D

Hardness Shore A



20

25

30

35

40

Oxygen Index LOI%

